

HE&M[®] ELIMINATOR 208 Hydraulic Oil 32


Ultra-Premium Anti-Wear Hydraulic Oils

Eliminator 208 hydraulic oil is an ISO 32 "All Weather" (down to -54.4°F) oil that protects against wear, oxidation, rust, corrosion and varnish. Formulated with the highest quality base oils, with high performance anti-wear & corrosion additives to meet the requirements of high pressure/output hydraulic systems and components' manufacturers.

Because of the unique additive chemistry and the premium oil's ability to resist oxidation, the byproducts caused from oxidation that lead to varnish are substantially reduced when compared to conventional oils.

Applications:

- Superior product for all hydraulic systems, especially where deposit build-up and sludge is problematic
- HE&M Saw's air saw lubricators
- Drain and Change for most industrial and mobile hydraulic systems
- Top-Treat for systems already using viscosity grade 32 hydraulic fluids
- Machines operating a wide range of temperatures and components using various metallurgies
- High performance hydraulic power units and equipment
- Systems with high pressures and temperatures
- Numerically Controlled (NC) Machine Tools

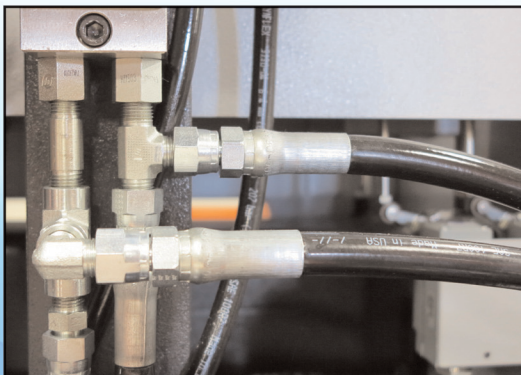

Available In:

- P-208000 1 Gallon
- P-208001 4 Gallon Case
- P-208005 5 Gallon Pail
- P-208055 55 Gallon Drum

Physical & Chemical Characteristics:

Appearance.....	Clear Liquid
Odor.....	Mild Petroleum Odor
Viscosity.....	31.8 cSt at 40°C
Flash Point.....	>428°F
Copper Strip Corrosion ASTM D130.....	1b
Pour Point.....	-48°C

Address: P.O. Box 1148 Pryor OK 74362 • **Toll Free:** 888-729-7787 • **Email:** info@hemsaw.com

HE&M, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any product, at any time without notice and without incurring any obligations. Copyright 112800 HEM, Inc. All rights reserved.